

DNV A60 25' Standalone Sleeper Module



CERTIFIED STACKABLE SLEEPER FOR ZONE II AND SAFE AREAS

Configure to sleep up to 6 personnel.

Maximize Safety

Multiple egress - emergency hatches on each side.

Fire and Blast Rated A60 fire rating and blast overpressure rating of

150mbar.

Allows for easy, safe securing and stacking.

Recessed Ends

utilities during transport.

Fast Deployment Twist lock installation

method reduces installation

HB Rentals' 25' DNV A60 Sleeper is designed to accommodate up to 6 individuals. Certified to DNV 2.7-1, the 25' sleeper module can be utilized where deck space is at a premium. Versatile in its design, the module provides the comforts of home and easy plug and play connections with safe and quick installation features. Clever engineering and construction allow our modules to stack up to four units high, depending on vessel type.

Certifications

- DNV 2.7-1
- BS EN 12079

Compliant

- MSC/Circ.860
- IMO/SOLAS
- HSE Notice 82

Designed for Marine Environments DNV 2.7-1 certified – built to withstand harsh, extreme conditions found in marine environments.

Structural and lifting components DNV certified.

Maximize Limited Site Space

- Flexible configuration standard 6 man sleeper layouts.
- Top and bottom ISO casting for stacking and securing.
- 25' length for use in projects with footprint limitations.

Increased Worker Comfort

- Each bunk is equipped with black-out privacy curtains, bunk lights and outlets.
- Each bunk contains additional network points, coaxial points and headphone jacks.
- Each bedroom comes standard with a desk area and file cabinets.

- Individual lockers for each person.
- Wet area is equipped with underfloor heating.

Increased Worker Comfort (cont.)

Easy corridor access utility service cupboard for all service systems.

Robust Climate Control

- HVAC system designed for external ambient between -20° C to $+45^{\circ}$ C.
- Split AC system each room is equipped with individual
- Isolated Systems HVAC systems are fitted with electrical to allow for individual unit maintenance.

Maximize Worker Safety

- A60 fire rated envelope.
- 150mbar blast rated construction.
- Automatic fire dampers.
- Equipped with ATEX Zone II pressurisation and F & G
- Multiple egress capable emergency exit hatches in each

Designed for Safe and Easy Deployment

- Twist lock installation reduces installation time.
- Daisy Chain connects consecutive buildings.
- Single side utility connection simplifies installation.
- Recessed side housing all utility service connections. Plumbing split out for black and grey water separation.
- Separate saltwater and potable water connections.






















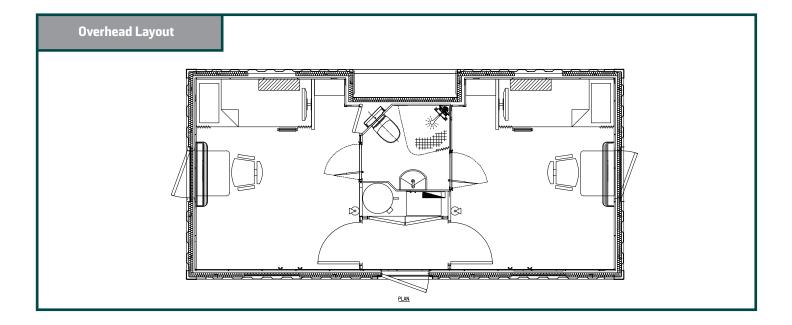

Specifications

Dimensions/Weight:

7800mm L x 3750mm W x 3050mm H (25' L x 12' W x 10' H) 15,000kgs (33, 069 lbs.)

Structure:

- DNV 2.7-1
- BS EN 12079
- Includes Lifting Pad Eyes, Slings and Shackles

Transportation:

• Fitted with ISO Casting

Bulkheads:

Fire Rating: A60

Protection System:

Safe Area Classification

Fire & Gas:

Independent standalone combined pressurisation and F&G systems

Fire Damper:

Electro-Mechanical Actuation

Power Requirements:

3ph + E 380V-480V, 32amp

Climate Control:

1 AC System/Bedroom

Design Temperature:

-20° C to +45° C

Regional Offices

Corporate Headquarters

5813 Highway 90 East Broussard, LA 70518 USA Tel +1 337 839 1641 Toll Free 800 262 6790

Americas Corporate Sales

11330 Clay Road Ste 200 Houston, TX 77041 USA Tel +1 281 999 0047 Fax +1 281 999 6505 Toll Free 866 999 0040

Europe, Middle East Africa, Asia-Pacific

Howe Moss Drive Kirkhill Industrial Estate, Dyce, Aberdeen, AB21 OGL Tel +44 1224 772304 Fax: +44 1224 772641

more info at www.hbrentals.com

Offshore Operating & Service Facilities

Aberdeen, UKEurope, Middle East, Africa, Asia-Pacific
Support

Broussard, USA
Main Operating Facility

Trinidad and Tobago Ciudad del Carmen, Mexico

Global Markets

Europe
Middle East
Mexico
Trinidad and
Tobago
United States/
Canada